

## Masonry Cement Composites (Pty) Ltd

Registration Number: 2014/263264/07


VAT No: 4090268972

27 Reuben Kaye Road, Parow Industrial, 7493

Tel: 021-934 0374 / Whatsapp: 068 006 4419

Generated on: 2026-07-29 05:01:59

### Hyrez CG 8.5Lt

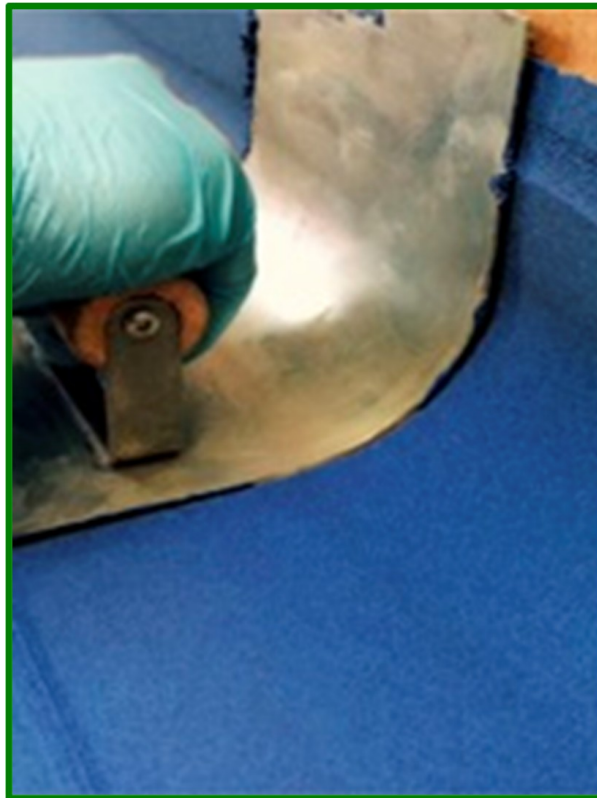

**SKU:** MWPUCG

#### TECHNICAL DATASHEET

##### **HYREZ CG**

Mould Applied Polyurethane Coving

HYREZ CG is a mould applied polyurethane floor coving for industrial use. Highly chemical resistant, with slight flexibility, to give a smooth, matt finish whilst still allowing hygienic cleanliness and seamless flooring. Supplied in a variety of colours for use in environments that range from back of house to wash bays, office to walkways, and light processing areas. Organohalogene tested and approved by Thales as part of the PU SCREED range of polyurethanes.

##### **TYPICAL APPLICATION**

PU CG COVING can be used in food processing plants, cold rooms, canning factories, bottling plants, foot traffic areas and environments where food safety, high chemical resistance, wet areas, and light industrial use are all prerequisites.

## ADVANTAGES

- Economical
- High early strength
- Slight Flexibility
- High chemical resistance
- High density
- Nonhazardous (food safe)
- Seamless
- Non slip application
- Low maintenance

## WATCH POINTS

- While polyurethane screeds are chemically resistant, they can still stain and a sealer coat is recommended in areas where concentrated dyes, or foods or chemicals with staining history are exposed to the screeds for long periods of time.
- A formal hygienic cleaning procedure is required to keep the surfaces hygienically clean and food safe.
- Polyurethane screeds are not UV stable and will yellow under bright lighting and sunlight.

## DIRECTIONS FOR USE

### Application Conditions:

Application temperature should be between 15C and 25C. Employ the use of localized cooling or heating equipment if necessary. Try avoid applying over hot surfaces or previously heated areas. Substrates must have a moisture content of 12% maximum and tensile strength of 1.5 N/mm<sup>2</sup> minimum.

### Surface Preparation:

Surfaces need to be cleaned and flattened or imperfections will show through flow applied applications. Light grinding to remove all surface defects is recommended. Scabbling and acid etching is not recommended. Anchor grooves along the top and bottom edging are recommended.

### Priming:

Prime with HYREZ PRIMER using a trowel or brush and allow to become tacky (1-2 hours) to form a good bond between the HYREZ CG and the substrate.

### Application:

Shake well the resin component to resuspend all the pigments in the liquid. In a bucket, premix the resin and the hardener until mixed together. While mixing, add in the powder aggregate gradually until the desired thickness, then mix until all wetted out and lump free. Then transfer the mix onto the coving substrate. Using a shaped mould, shape the coving over the prepared surface. Only mix enough product that can be applied within 12-15 minutes. Allow to cure for 12 hours. Protect the curing floor from damp, condensation, and direct water for at least 24 hours.

### Limitations:

Do not apply in humidity is expected to be greater than 90% RH, or if the surface temperature is less than 3C above the dew point. Ensure that the curing temperature never drops below 5C, and do not apply over concrete that is less than 25 MPa compressive strength. Colour variations can occur between batches so apply sections from the same batch of resin. Touching up will always be visible and should be avoided. If colour variations occur, overcoat the entire surface with HYREZ UVR coating.

## TYPICAL PROPERTIES

Adhesion to Concrete >1.5 N/mm<sup>2</sup>

Shore D Hardness 55

Slip Resistance Dry 55

Slip Resistance Wet N/A

Application Temp. 15C to 25C

Surface Finish Smooth matt

Application Thickness 5 – 100 mm

Pot Life 12-15 Minutes

Use Temperature -20C to 50C

Yield 8.5 Litres per kit

Coverage (100x50x6mm) 0.5 – 0.6 linear metre per litre

Time to Foot Traffic 12 Hours

Time to Wheel Traffic 24 Hours

Time to Heavy Traffic 48 Hours

Full Chemical Resist. 7 Days

#### Equipment Care

All tools should be cleaned with thinners or xylene immediately after use.

#### Warranty

*Masonry Cement Composites (PTY) Ltd products have a manufacturing defect free warranty. Products, when applied as stipulated in this technical datasheet, will perform as specified without manufacturing defect.*

REVISION: 5.2